
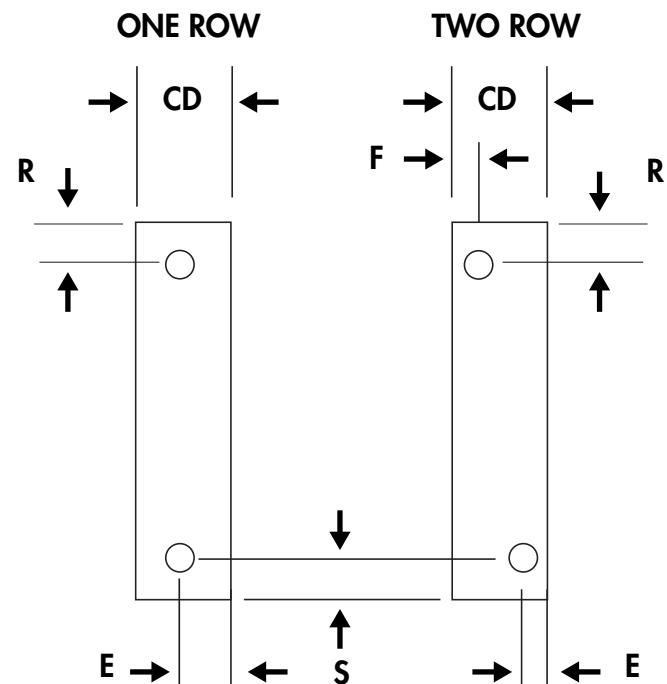


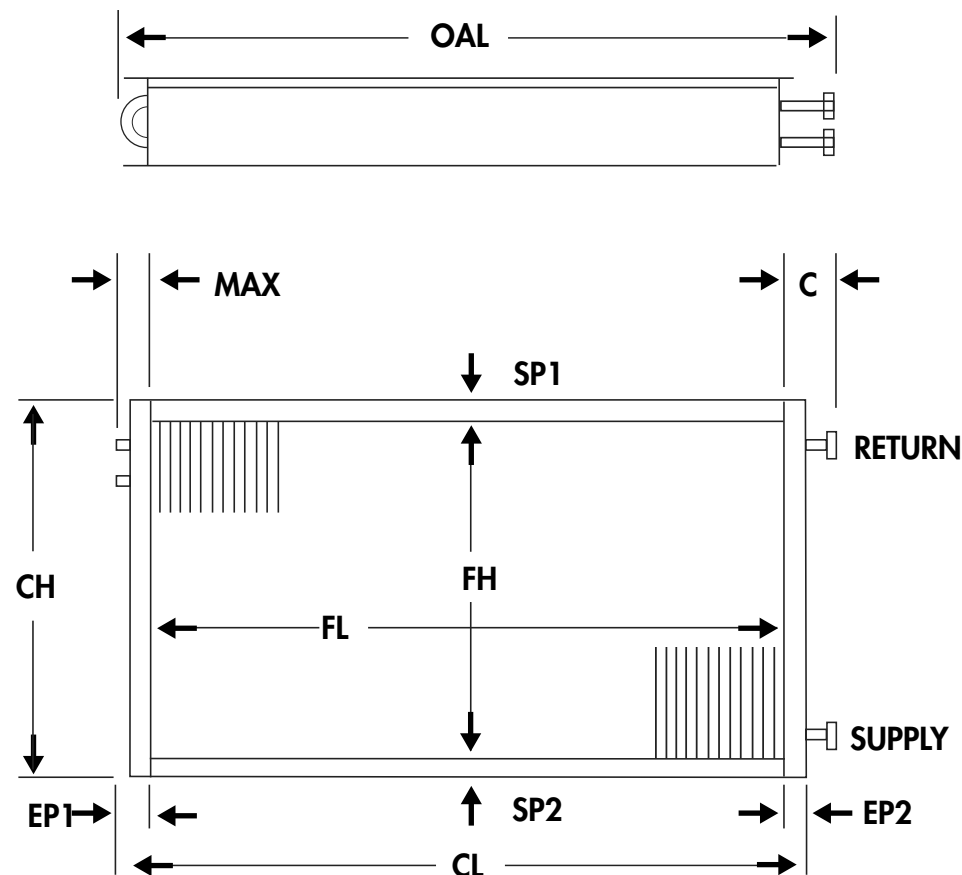

DIMENSIONAL DATA IN INCHES													OAL = MAX + FL + C		
ITEM	QTY	ROWS	FPI	SP1	FH	SP2	CH	EP1	FL	EP2	CL	CD	MAX	C	OAL
CUSTOMER															
MODEL N°															
NOTES															
DATE															
Performance Data	CFM		EDB/WB		LFB/LWB		CAPACITY		LWT		EWT		GPM		

Please Email Form to: info@nationwidecoils.com

BOOSTER COILS

ROWS AVAILABLE	☐ 1	☐ 2		
FPI AVAILABLE	☐ 8	☐ 10	☐ 12	
TUBES OD & WALL Thickness <i>COPPER ONLY</i>	☐ 5/8	☐ .020	☐ 1/2	☐ .016
FINS Material & Thickness	☐ ALUM.	☐ .006	☐ .010	
	☐ COPPER	☐ .006		
CASING	☐ 16 GA. GALV. STEEL			☐ 16 GA. STAINLESS STEEL
MODEL NO. (Example)	W 8 1 12 24 N	Water 8 fpi 1 row Fin Height Fin Length Non Headered		

CONNECTION SIZES

☐ 3/4 MPT☐ 1 MPT

☐ SUPPLY☐ RETURN☐ CU

NATIONWIDE COILS®

1-888-COIL-PRO
www.nationwidecoils.com