


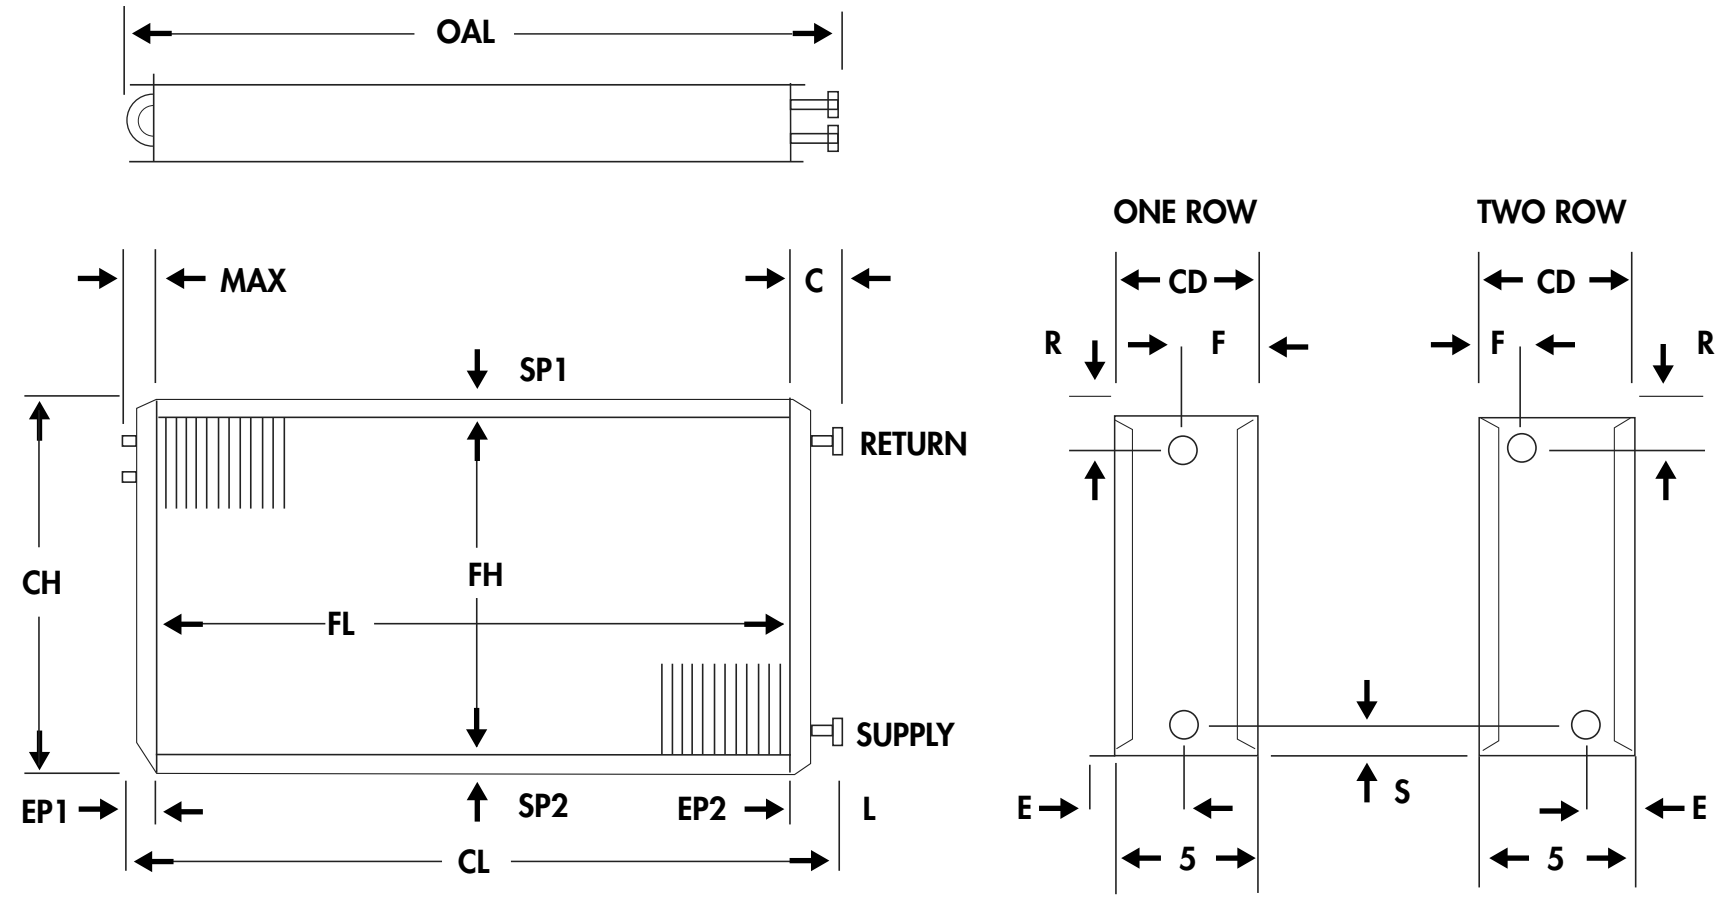

SLIP DRIVE BOOSTER

ROWS AVAILABLE	☐ 1	☐ 2			
FPI AVAILABLE	☐ 8	☐ 10	☐ 12		
TUBES OD & WALL Thickness COPPER ONLY	☐ 5/8	☐ .020	☐ 1/2	☐ .016	
FINS Material & Thickness	☐ ALUM.	☐ .006	☐ .010	☐ COPPER	☐ .006
CASING	☐ 16 GA. GALV. STEEL ☐ 16 GA. STAINLESS STEEL				
MODEL NO. (Example)	SP - Slip & Drive 8 - 8 fpi 1 - 1 row 12 - Fin Height 24 - Fin Length N - Non Headered				

CONNECTION SIZES


☐ 3/4 MPT

☐ 1 MPT

☐ SUPPLY

☐ RETURN

☐ CU



NATIONWIDE COILS®

1-888-COIL-PRO
www.nationwidecoils.com

DIMENSIONAL DATA IN INCHES													OAL = MAX + FL + C		
ITEM	QTY	ROWS	FPI	SP1	FH	SP2	CH	EP1	FL	EP2	CL	CD	MAX	C	OAL
CUSTOMER															
MODEL N°															
NOTES															
DATE															
Performance Data	CFM		EDB/EWB		LDB/LWB		CAPACITY		EWT		LWT		GPM		

Please Email Form to: info@nationwidecoils.com