



DX COILS  
INTERTWINED

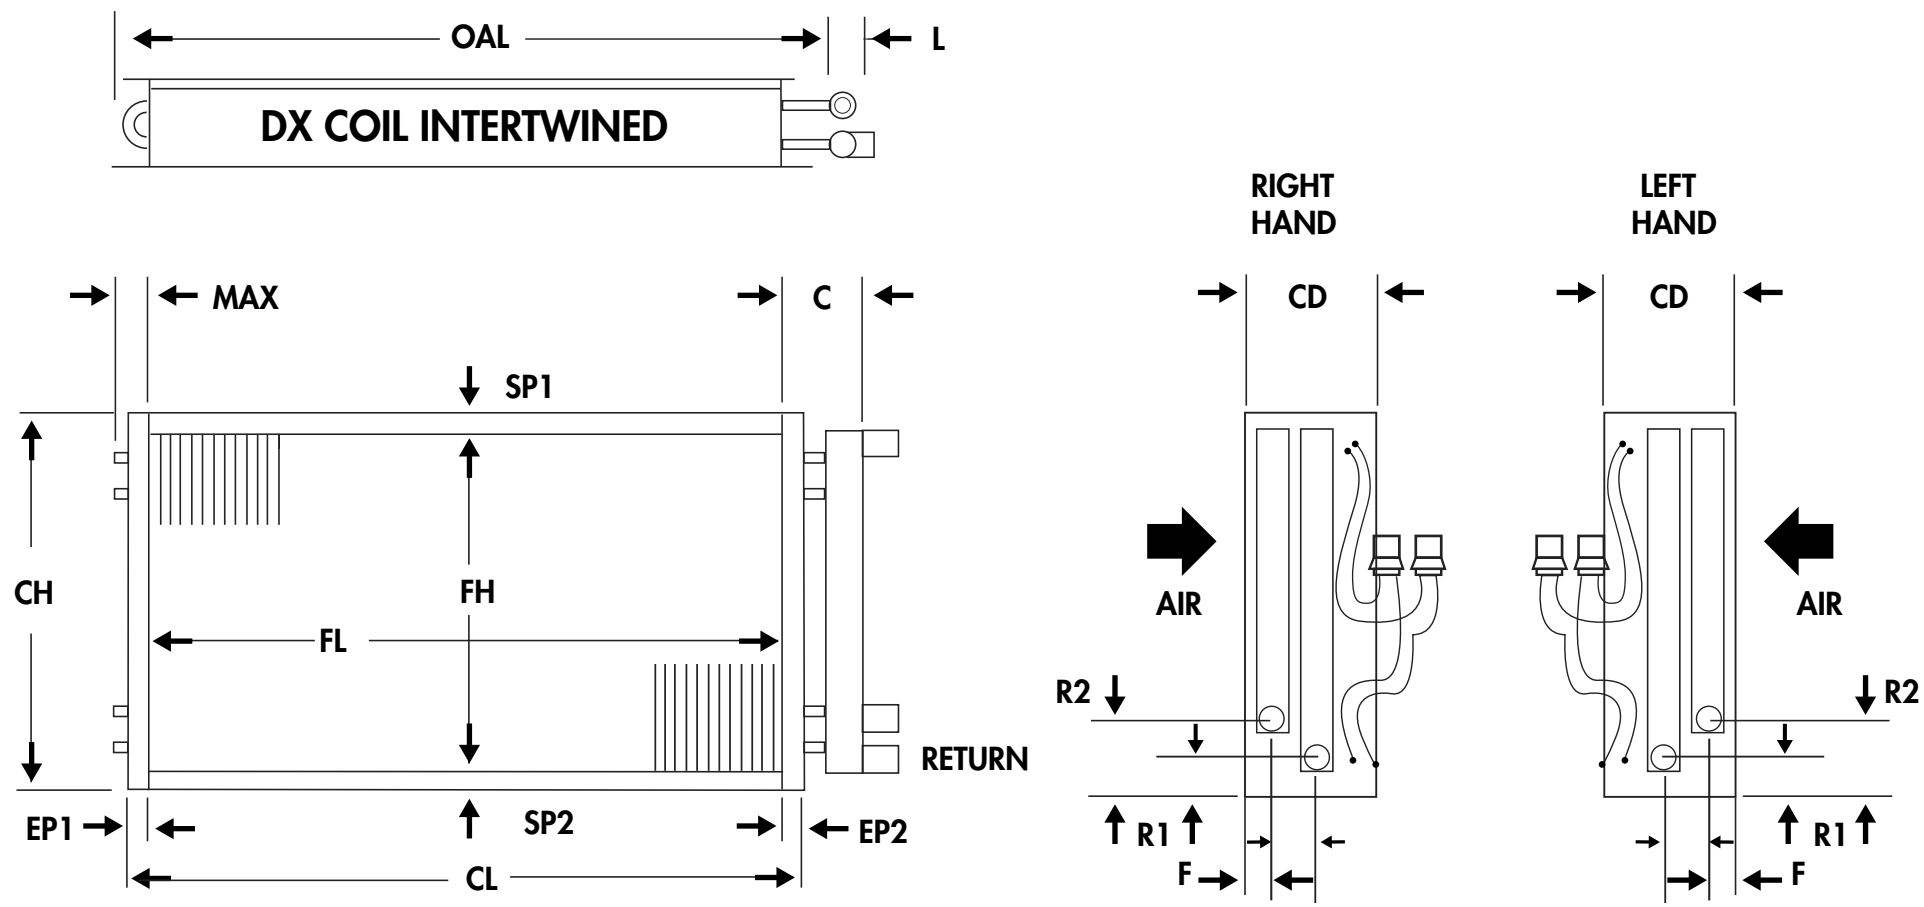

|                                                    |                                                                                                                                                                                                                                                            |                                 |  |                             |  |
|----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|--|-----------------------------|--|
| ROWS AVAILABLE                                     | <input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5<br><input type="checkbox"/> 6 <input type="checkbox"/> 8 <input type="checkbox"/> 10 <input type="checkbox"/> 12    |                                 |  |                             |  |
| FPI AVAILABLE                                      | <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10<br><input type="checkbox"/> 11 <input type="checkbox"/> 12 <input type="checkbox"/> 13 <input type="checkbox"/> 14 |                                 |  |                             |  |
| TUBES OD & WALL Thickness COPPER ONLY              | <input type="checkbox"/> 5/8 <input type="checkbox"/> .020 <input type="checkbox"/> .025<br><input type="checkbox"/> 3/8 <input type="checkbox"/> .035 <input type="checkbox"/> .049<br><input type="checkbox"/> 1/2 <input type="checkbox"/> .016         |                                 |  |                             |  |
| FINS Material & Thickness                          | <input type="checkbox"/> ALUM. <input type="checkbox"/> .006 <input type="checkbox"/> .010<br><input type="checkbox"/> COPPER <input type="checkbox"/> .006                                                                                                |                                 |  |                             |  |
| CASING                                             | <input type="checkbox"/> 16 GA. GALV. STEEL<br><input type="checkbox"/> 16 GA. STAINLESS STEEL                                                                                                                                                             |                                 |  |                             |  |
| HEADERS COPPER ONLY                                | <input type="checkbox"/> 5/8 <input type="checkbox"/> 7/8 <input type="checkbox"/> 1 1/8<br><input type="checkbox"/> 1 3/8 <input type="checkbox"/> 1 5/8 <input type="checkbox"/> 2 1/8<br><input type="checkbox"/> 2 5/8 <input type="checkbox"/> 3 1/8  |                                 |  |                             |  |
| CONNECTION SIZES<br><input type="checkbox"/> SWEAT |                                                                                                                                                                                                                                                            |                                 |  |                             |  |
| <input type="checkbox"/> SUPPLY                    |                                                                                                                                                                                                                                                            | <input type="checkbox"/> RETURN |  | <input type="checkbox"/> CU |  |

| DIMENSIONAL DATA IN INCHES |     |      |     |     |    |     |    |     |    |     |    |     |   |     |   | RETURN |   |   |
|----------------------------|-----|------|-----|-----|----|-----|----|-----|----|-----|----|-----|---|-----|---|--------|---|---|
| ITEM                       | QTY | ROWS | FPI | SP1 | FH | SP2 | CH | EP1 | FL | EP2 | CL | MAX | C | OAL | L | CD     | R | F |
|                            |     |      |     |     |    |     |    |     |    |     |    |     |   |     |   |        |   |   |
| CUSTOMER                   |     |      |     |     |    |     |    |     |    |     |    |     |   |     |   |        |   |   |
| MODEL N°                   |     |      |     |     |    |     |    |     |    |     |    |     |   |     |   |        |   |   |
| NOTES                      |     |      |     |     |    |     |    |     |    |     |    |     |   |     |   |        |   |   |
| DATE                       |     |      |     |     |    |     |    |     |    |     |    |     |   |     |   |        |   |   |
| Performance Data           |     | CFM  |     | EAT |    |     |    |     |    |     |    |     |   |     |   |        |   |   |

Please Email Form to: [info@nationwidecoils.com](mailto:info@nationwidecoils.com)



NATIONWIDE COILS®

1-888-COIL-PRO  
[www.nationwidecoils.com](http://www.nationwidecoils.com)